


U - ES

Drop Wire

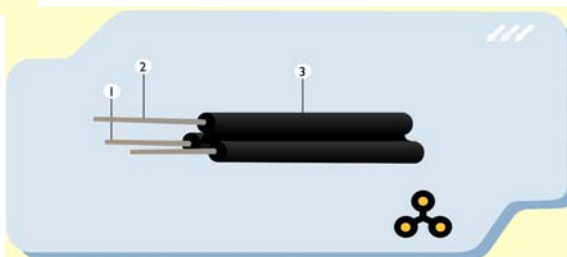

1. Copper Conductor
2. Galvanized Steel Wire
3. Polyethylene Insulation

TELECOMMUNICATION CABLES

TECHNICAL DATA

SPEC
STD

Specification : STEL - K - 004 / SII - 0614 - 82

Cu

Conductor Shape : Annealed Copper Wire

APL

Application : Used for service drop wire for covering spans not more than 20 m.

DIMENSIONAL DATA

Cable Size	Conductor Diameter Nominal	Insulation Thickness Nominal	Overall Diameter Approx	Weight of Cable Approx.	Standar Length	Drum Size
Pairs	(mm)	(mm)	(mm)	(kg / km)	(m)	
1	0.6	0.75	5.0	26	500	Coil
	0.8		6.0	31		

ELECTRICAL DATA

Cable Size	Resistance at 20°C	
	Conductor Max	Insulation Min
Pairs	(Ohm / km)	M. Ohm. km
1	65	10.000
	36.5	

