


NYMHY 500 V

Copper Conductor, PVC Insulated, PVC Sheathed

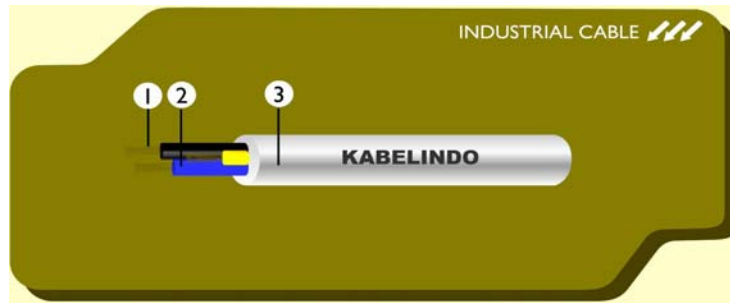

1. Conductor : Annealed Flexible Copper wire
2. Insulation : Extruded PVC
3. Sheath : Extruded PVC

PVC LOW VOLTAGE CABLE

TECHNICAL DATA

Spec	Specification : SPLN 42 - 6 : 1991, IEC 60502 - 1 : 1997
APL	Used for indoor location, connection or portable appliance

Cu	Flexible Copper Wire
DCV	DC Test Voltage : 5 kV for 5 minute

DIMENSIONAL DATA

2 CORES

SIZE	No. of wire and Diameter Of wire	Nominal Thickness		Approximately		Min. Bending Diameter	Std. Length per reel
		Insulation	Outer Sheath	Overall Diameter	Net. Weight		
mm ²	pcs / mm	mm	mm	mm	kg/km	mm	m
0.5	16 / 0.20	0.6	0.8	6	50	108	Coil @ 100
0.75	24 / 0.20			6.5	65	117	
1	32 / 0.20			6.7	75	121	
1.5	30 / 0.25	0.7	0.9	7.7	98	139	
2.5	50 / 0.25	0.8	1	9.4	152	169	
4	56 / 0.30			11.3	218	203	

ELECTRICAL DATA

SIZE	DC Resistance at 20°C		Current Carrying Capacity at 30°C		Conductor Short Circuit Current Capacity at :			DC Voltage Test
	Conductor (Max)	Insulation (Min)	at 30°C	at 40°C	0.1 second	0.5 second	1.0 second	
mm ²	Ohm/km	M.ohm.km	A	A	kA	kA	kA	5000 V for 5 minutes
0.5	39.0	40	2	1.8	0.22	0.10	0.07	
0.75	26.0		6	5.5	0.34	0.15	0.11	
1	19.5		10	9.2	0.45	0.20	0.14	
1.5	13.3		15	13.8	0.67	0.30	0.21	
2.5	7.98		20	18.4	1.12	0.50	0.36	
4	4.95		27.5	25.3	1.80	0.80	0.57	